

IT DL 03/05 3,5-Slot Data Acquisition Industrial Module



Specifications

- System :
 - C P U SGS ST PC 5X86, 16MB RAM ,CONTROLLER CRT,64MB IDE MODULE
 - 3 Serial ports RS232 , 1 Serial port RS232/RS485
- One 8cm ball bearing cooling fan with removable filter
- Supports I/O:
 - D L 03 : 8 opto digital input , 8 digital output , 16 analog input 12bit / 12,5KHZ
 - D L 05 : 16 opto digital input , 16 digital output , 32 analog input 12bit / 12,5KHZ
- Power supply : +/- 12V @ 0,5A,+5V @ 6A
- Mounting kit for rack mounting solution
- Vibration : 5~17Hz, 0.1" double amplitude displacement
17~640Hz, 1.5G acceleration peak to peak
- Shock : 10G acceleration peak to peak
- Particular Interface : Directly digital communication to Gas Analyzer
- Dimensions :
 - D L 03 : 266(W) x 88(H) x 254(D)mm; (10.5" x 3.5" x 10")
 - D L 05 : 266(W) x 132(H) x 254(D)mm; (10.5" x 5.2" x 10")

Features:

- Designed for Environment Data Acquisition
- S.O. Linux
- Remote control with software ADAS


Ordering Information:

- DL 03 :** 3-slot compact datalogger with Rack option
- DL 05 :** 5-slot compact datalogger with Rack option

Standard I/O :

- DL 03:**
16 digital I/O 16 analog input
- DL 05**
32 digital I/O 32 analog input

Dimensions: (DL 03)

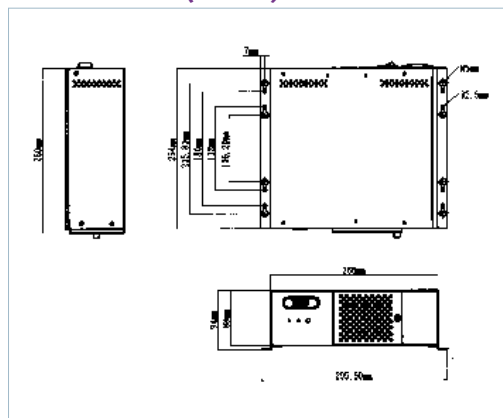

Dimensions: (DL 05)

